

RNVR4216-16P-4KS2/L

16 Channel 1U 2HDDs 16PoE Network Video Recorder



- New 4.0 user interface, Security baseline 2.1
- H.264, H.265, Smart H.264+ and Smart H.265+. H.265 auto switch
- Max decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding
- Supports mainstream cameras of ONVIF and RTSP protocols
- P2P remote surveillance, video play on mobile device
- VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map and SMD
- Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches

Series Overview

Rhodium RNVR4000-4KS2/L supports 4K and H.265 encoding technology with excellent performance at an affordable price. For applications where image details are highly required, it delivers the capability of 4K resolution processing. The NVR can be served as edge storage, central storage or backup storage with an intuitive shortcut operation menu for remote management and control.

Due to its cost-effective and easy-to-install design, this NVR is ideal for a wide range of applications such as public safety, water conservancy, transportation, city centers, education, and financial institutions.

The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems that work independently of video management system (VMS). It features an open architecture that supports for multi-user access and is compatible with ONVIF Profile S, T, G protocol, enabling interoperability with IP cameras.

Functions

Perimeter Protection by Camera

Automatically filters out false alarms caused by animals, rustling leaves, bright lights and etc.

Enable the system to act secondary recognition for the targets.
Improves alarm accuracy.

Face Detection by Camera

Face detection is to detect if there is any human face appearing in the video. This technology adopts a deep learning algorithm to support face detection, tracking, optimization and capturing, and then output the best face snapshot.

SMD Plus by Camera

With intelligent algorithm, Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

People Counting by Camera

With deep learning algorithm, People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/weekly/daily reports to meet your requirements.

Smart Codec

With advanced scene-adaptive rate control algorithm, smart codec technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Mobile App Client

The app is available on the iOS App Store and Google Play. It makes surveillance easy and simple, allowing you to remotely access back-end devices, view live video, receive event push notifications, and search for recorded videos from an iPhone, iPad, or Android phone at any time from virtually anywhere.

RNVR4216-16P-4KS2/L

16 Channel 1U 2HDDs 16PoE Network Video Recorder

Technical Specification

System

Main Processor	Industrial-grade embedded processor
OS	Embedded Linux
Operation Interface	WEB/operating in local GUI

Perimeter Protection by Camera

Performance	8 channels
AI Search	Search for pictures by channel, time and event type

Face Detection by Camera

Performance	4 channels
Face Attributes	6 attributes: Gender, age, glasses, expression, mouth mask, and beard
AI Search	Search for pictures by channel, time and face attributes

SMD Plus by Camera

Performance	12 channels
AI Search	Search by target classification (human, vehicle)

Video

Access Channel	16
Network Bandwidth	Access: 160Mbps Storage: 160Mbps Forward: 64Mbps
Resolution	8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1
Decoding Capability	8x1080p@30 fps
Video Output	1xVGA output, 1xHDMI output Supports simultaneous video sources output for VGA and HDMI
Multi-screen Display	1, 4, 8, 9, 16, views
Third-party Camera Access	ONVIF; RTSP

Compression

Video	Smart H.265/H.265/Smart H.264/H.264/MJPEG
Audio	PCM/G711A/G711U/G726/AAC

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search; P2P; auto register
Mobile Phone Access	Android; iOS
Interoperability	ONVIF(profile T/S/G); CGI; SDK
Browser	Chrome; IE9 or later; Firefox

Record Playback

Multi-channel Playback	Up to 16 channels for playback
Record Mode	Manual record; alarm recording; SMD recording; smart recording
Storage	Local HDD; network
Backup	USB storage device
Playback Function	1. Play/pause/stop/slow/quick/backward/by frame 2. Full screen, backup (video clip/file), partial zoom in, and audio on/off

Storage

Disk Group	Yes
------------	-----

Alarm

General Alarm	Motion detection, privacy masking, video loss, scene changing, PIR alarm, IPC external alarm
Anomaly Alarm	Camera disconnection, storage error, disk full, IP conflict, MAC conflict, login locked, and cybersecurity exception
Intelligent Alarm	Face detection, perimeter protection (intrusion and tripwire), IVS, people counting, heat map, and SMD alarms
Alarm Linkage	Recording, snapshot, local external alarm output, audio, buzzer, log, preset, and email

External Port

Audio Input	1 × RCA input
Audio Output	1 × RCA output
HDD	2 SATA III ports, up to 10TB for a single HDD. The maximum HDD capacity varies with environment temperature
Alarm Input	4
Alarm Output	2
USB	2 (1xfront USB2.0; 1xback USB2.0)
HDMI	1 (supports up to 4K resolution output)
VGA	1
Network	1xRJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
PoE	16


General Parameter

Power Supply	100V–240V, 47Hz–63Hz, 3.5A
Power Consumption	<10 W (HDD not included, idling) Total output power of PoE is 117W, the maximum output power of a single port is 25.5W
Net Weight	2.63Kg (8.50lb)
Gross Weight	3.91Kg (8.62lb)
Product Dimensions	375 mm × 327.4 mm × 53.8 mm (14.76" × 12.89" × 2.12") (W × L × H)
Package Dimensions	170 mm × 449 mm × 421 mm (6.69" × 17.68" × 16.57") (W × L × H)
Operating Conditions	–10°C to +55°C (+10°F to +131°F)
Storage Conditions	0°C to +40 °C (32 °F to 104 °F)
Operating Humidity	10%~93%
Storage Humidity	30%~85%
Operating Altitude	3000m (9842.52ft)
Installation	Desktop/Rack mount
Certifications	CE: EN62368-1; EN55032, EN55024, EN55035, EN61000-3-2, EN61000-3-3 EN50130-4 FCC: Part 15 Subpart B

RNVR4216-16P-4KS2/L

16 Channel 1U 2HDDs 16PoE Network Video Recorder

Dimensions (mm[inch])

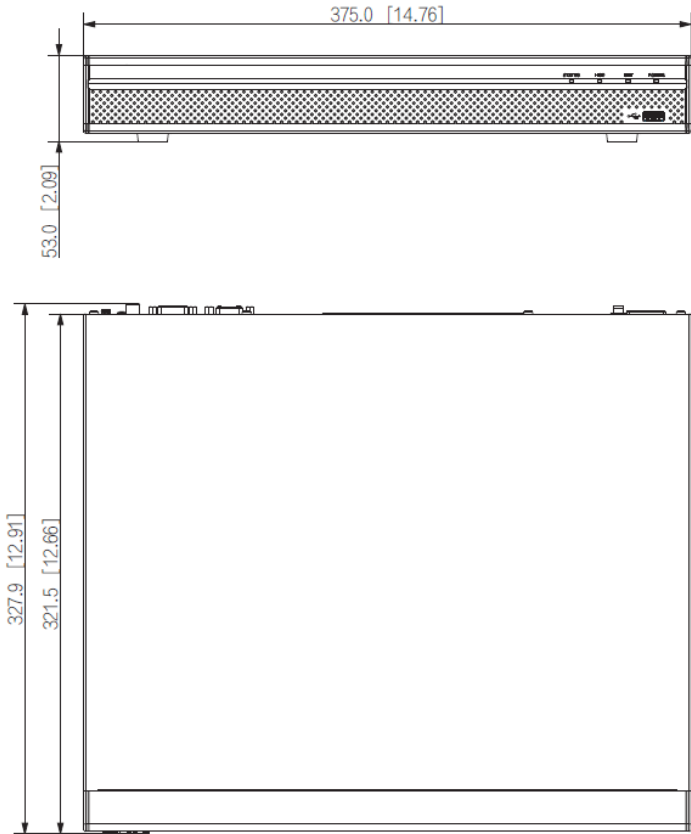

Panels

