

RBU8090AKAN(-S)-PZ

12MP IR Varifocal Bullet Network Camera



Key Features

- 1/1.7" STARVIS™ CMOS
- Max. 12MP(4000×3000) @25/30fps resolution
- 4.1 to 12.8 mm motorized focal lens
- Support face, human, vehicle detection and capture
- Intelligent analysis: intrusion, single / double line crossing, loitering, wrong-way, Illegal parking, smart motion detection (SMD), and people counting
- True WDR, 3D DNR, ROI, Defog, HLC
- Smart IR distance up to 60 m
- Built-in mic, 1/1 audio input/output, 1/1 alarm input/output
- -S: Built-in speaker
- Built-in micro SD card slot (up to 1 TB)
- IP66, IK10 protection

Technical Specification

Camera	
Image Sensor	1/1.7" Progressive Scan CMOS
Max. Resolution	12MP, 4000(H) × 3000(V)
Electronic Shutter	Auto/Manual, 1/5 to 1/50,000s
Min. illumination	Color: 0.001 Lux @ (F1.2, AGC ON) , B/W: 0.0005 @ (F1.2, AGC ON)
Day & Night	Auto (ICR)
Wide Dynamic Range	True WDR 120DB
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°
Lens	
Lens Type	Varifocal lens, Motorized focal
Iris	Auto Iris
Focal Length	4.1 to 12.8 mm
Max. Aperture	F1.53
Field of View (FOV)	H: 93.8° to 34°, V: 70.1° to 25.8°
DORI Distance	
Detect	111 to 279 m (364.2 to 915.4 ft)
Observe	44.4 to 111.6 m (145.7 to 366.1 ft)
Recognize	22.2 to 55.8 m (72.8 to 183.1 ft)
Identify	11.1 to 27.9 m (36.4 to 91.5 ft)
DORI (Detect, Observe, Recognize, and Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances	
Illuminator	
Illuminator Type	IR
Illumination Distance	IR distance up to 60 m (196.9 ft)
Illumination On/Off Control	Auto/Manual
IR Wavelength	850 nm



Intelligent Analytics

Multi-Object Detection	Supports face, human, vehicle detection and capture. Supports multiple frame modes: Full Frame, Four-corner Frame, and Mosaic.
Intelligent Analysis	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way detection, Illegal parking, and Smart motion detection Support alarm triggering by specified target types (human and vehicle)
People Counting	Support

Video and Audio

Streaming Capability	3 Streams
Stream/Frame Rate	Stream1: 4000×3000, 2592×1944, 1280×960 @25/30fps Stream2: D1, VGA, CIF @25/30fps Stream3: VGA, CIF, QVGA @25/30fps
Bit Rate Control	CBR/VBR
Bit Rate	Stream1: 200 kbps to 16 Mbps Stream2: 100 kbps to 6 Mbps Stream3: 100 kbps to 3 Mbps
Region of Interest	Off/On (8 areas, Rectangle)
Smart Encode	Support
Region of Interest (ROI)	Off/On (8 Zone, Rectangle)
Audio Compression	G.711 A-law, G.711 μ-law, RAM PCM
Audio Bit Rate	64 Kbps (G.711), 128 Kbps (RAW_PCM)

Image

Image Adjustment	Brightness, Sharpness, Contrast, Saturation adjustable
Scene Mode	Indoor, Outdoor, Mirror, Corridor mode




Exposure Mode	Auto, Manual, Shutter priority
White Balance	Auto, Tungsten, Fluorescent, Daylight, Shadow, Manual
Day/Night Setting	Auto, Day, Night, Time
Noise Reduction	2D/3D DNR
Image Enhancement	HLC, BLC, Defog, WDR
Privacy Masking	4 areas
Event	
Alarm Triggers	IVS, Motion detection, Alarm input, Network alarm, Disk alarm, Day/Night switch alarm, Abnormal sound detection
Event Actions	Alarm record, Alarm output, Wiegand output, FTP upload, SMTP upload, Audible alarm output
Network	
Protocols	IPv4/IPv6, HTTP/HTTPS, DNS, DDNS, DHCP, PPPoE, RTSP/RTCP/RTP, TCP/UDP, NTP, ARP, UPnP, FTP, SMTP, QoS, ICMP, IGMP, SMTP, 802.1x, SNMP, Multicast
Interoperability	ONVIF (Profile S/T/G/M), SDK, CGI
User/Host Level	Up to 10 users, 3 levels: Administrator, Operator, Media user
Security	IP address filter, encrypted HTTPS, Illegal login lock, IEEE 802.1x
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Interface	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Built-in Microphone	Support
Built-in Speaker	-S: Support
Audio Interface	1ch Input, 1ch Output
Alarm Interface	1ch Input, 2ch Output



SD Card Slot	Built-in, up to 1 TB
Reset Button	Support
General	
Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian. Default: English
Power Supply	12 VDC (-15% to +25%)/PoE (802.3af)
Power Consumption	Typical: 4.6 W (12 VDC) Max: 12.5 W (12 VDC, with Focus + WDR + Speaker + IR on)
Operating Temperature	-40°C to 60°C (-40°F to 140°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66, IK10
Certifications	CE-EMC (EN 55032:2015+A1:2020, EN 55035:2017+A11:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-6-4:2019, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A2:2021) FCC (FCC 47 CFR 15, Subpart B, ANSI C63.4-2014)
Casing	Aluminum alloy
Dimensions	110.3 × 356.33 mm



Dimensions (mm)

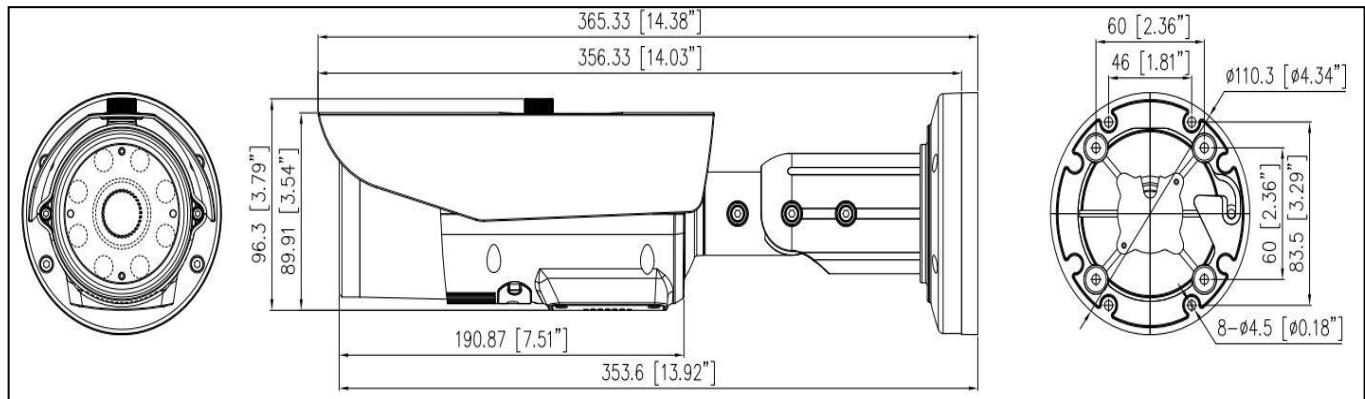

Accessories

Optional :

			
RSN-CBK645G Junction Box	RSN-CBK627D Pole Mount	RSN-CBK101A Pole Mount	RSN-CBK102A Corner Mount