
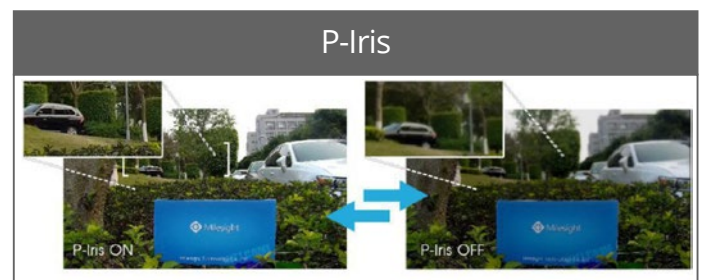


RBU8262-FPB

4K WDR IR Vandal Proof Motorized Pro Bullet Camera





Diamond 5 Megapixel Bullet Network Cameras

- ▶ 1/1.18" 8Megapixel progressive scan Sony STARVIS™ CMOS
- ▶ H.265 +/H.265(HEVC)/H.264 +/H.264/MJPEG
- ▶ Video Bit Rate: 16Kbps~16Mbps(CBR/VBR Adjustable)
- ▶ Triple-stream Encoding
- ▶ 30fps@(2592x1944), 30fps@(1920x1080)
- ▶ Color: 0.006Lux@F1.2 B/W: 0Lux with IR on
- ▶ Starlight Technology
- ▶ Super WDR 120dB
- ▶ P-iris
- ▶ Motorized Lens: 4~12mm @F1.4
- ▶ Field of View: H84°~H38°/D95°~D43°/V49°~V21°
- ▶ Max. IR LEDs Length 60m
- ▶ Audio I/O: 1/1 (G.711/AAC)
- ▶ Alarm I/O: 1/1
- ▶ ONVIF Profile S & G
- ▶ Support micro SD up to 128G
- ▶ Power Consumption: 5W, 9W MAX (With IR on)
- ▶ PoE (802.3af)/ DC 12V±10% , IP67, IK10, -30°~60°

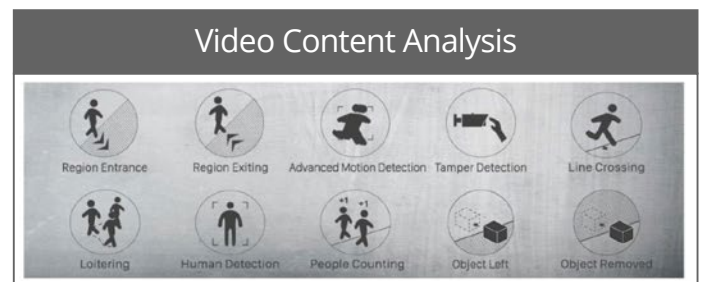

	Model	RBU8162-F(I)PB (4K)	RBU8262-F(I)PB (4K)
Camera	Image Sensor	1/2.5" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
	Min. Illumination	Color: 0.01Lux@F1.2 B/W: 0Lux with IR on	Color: 0.006Lux@F1.2 B/W: 0Lux with IR on
	WDR	120dB Super WDR	
	Lens	Motorized 3.3~12mm @F1.4 P-Iris(Optional)	Motorized 3.6~10mm @F1.4 P-Iris(Optional)
	Mount	Φ14	
	Field of View	H101°~H39°/D116°~D46°/V56°~V21°	H110°~H46°/D125°~D54°/V61°~V25°
	Shutter Time	1/100000s~1s	
	IR Distance	Up to 60m	
	Day&Night	ICR Filter Auto Switch	
Video	Max. Image Resolution	3840x2160	
	Primary Stream	15fps@(3840x2160), 30fps@(3072x2048, 2592x1944, 2592x1520, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)	30fps@(3840x2160, 3072x2048, 2592x1944, 2592x1520, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)
	Secondary Stream	30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192)	
	Tertiary Stream	30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192)	
	Video Compression	H.265*/H.265(HEVC)/H.264*/H.264/MJPEG	
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)	
	Image Setting	Brightness/Contrast/Saturation/Sharpness	
Network	Ethernet	1*RJ45 10M/100M/1000M Ethernet Port	
	Network Storage	NAS(Support NFS, SMB/CIFS)	
	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL	
Audio	Audio Compression	G.711/AAC	
	Audio I/O	1/1	
System	Alarm I/O	1/1	
	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 128G	
	Advanced Function	Privacy Masking, Backlight Compensation, HLC, 2D DNR, 3D DNR, ROI, Anti-fog, White Balance, EIS, IP Address Filtering	
	SIP/VoIP Support	Yes, Voice & Video-over-IP	
	Event Trigger	Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.	
	Event Action	FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc.	
	Video Analysis (Optional)	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed	
System Compatibility	ONVIF Profile S & G		
General	Working Temperature	-40℃~60℃	
	Working Humidity	0~90%(Non-condensing)	
	Power Supply	PoE (802.3af)/ DC 12V±10%	
	Power Consumption	5W MAX	
		9W MAX (With IR on)	
	Weather Proof	Up to IP67-rated for Weather-resistant Performance	
	Housing	Vandal-proof IK10-rated Metal Housing (Optional)	
	Weight	1080g	
	Dimensions	134mmX126mmX285mm	
Warranty	3/5 Years		

Structure Diagrams

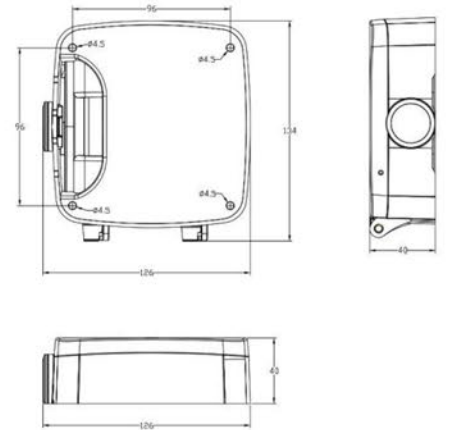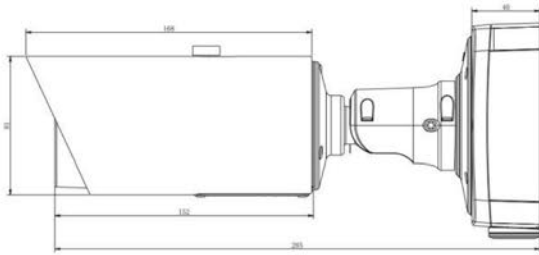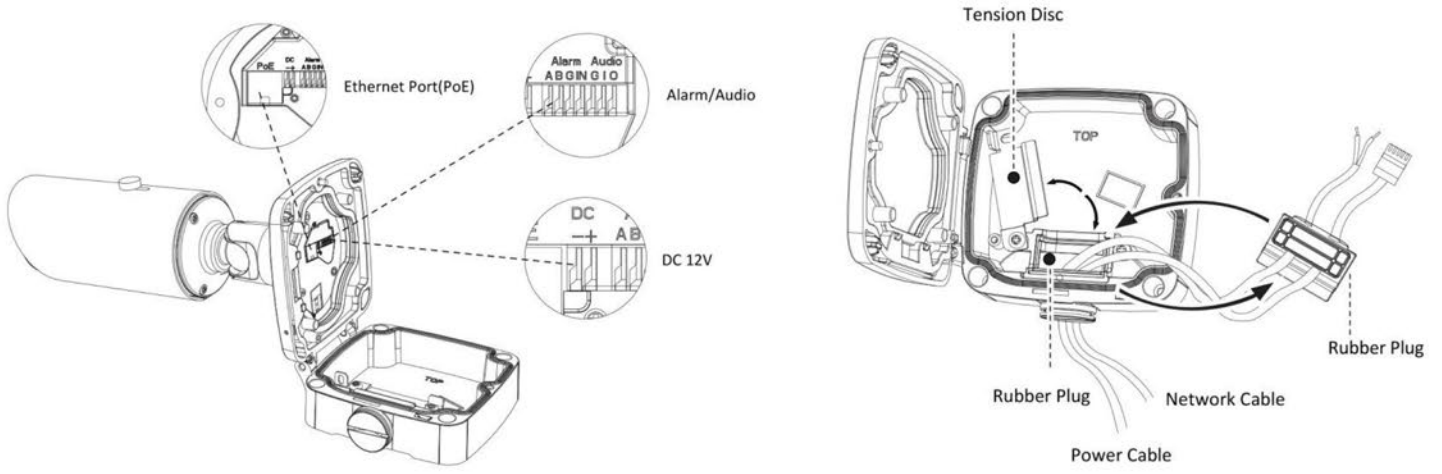

Units: mm

Accessories Support

RA01 Pole Mount

Weight: 720g
Dimensions: 170*51.5*152.6mm



RA02 Internal Corner Bracket

Weight: 540g
Dimensions: 170*23.2*205.3mm



RA03 External Corner Bracket

Weight: 900g
Dimensions: 170*152.6*76.3mm



A62 Junction Box

Weight: 510g
Dimensions: 134*127*40mm

